

POWER TOOL CATALOGUE 2023 - 2024

Confilms



# Innovation never stops

Ever since 1948 we've been designing and developing high performance power tools. For over 70 years our Japanese engineers have utilized their technological knowledge, skills and experience to constantly improve our power tools. Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details that ensures the professional in finishing every single job as easy as possible. That's what drives us and keeps us one step ahead.



We proudly introduce to you our 2023-2024 catalogue. Have a look at this year's HiKOKI high performance power tools. All bundled in a clear book. Some you may already know, some are provided with the newest designs and latest technologies our in-house designers and engineers have been working on.



Chargers/ Batteries

Drilling

Demolition

Fastening

Contents. Everything to reach the highest performance.

nding	
Grinder	53
d Grinder	58
ishing & Sanding	
der Polisher	60
ital Sander	60
wing	
ular Saw	63
er Saw	64
aw	65
procating Saw	66
in Saw	67
tting	
er	67
off Machine	68
ning & routing	
er	68
ter	70
imer	70
ssure Washer	
sure Washer	71
sure Washer	72
scellenous	
ar	72
bler	73
ver	73
er	73
t Gun	74
pressor	75

### Gri Disc Hand Pol Sand Orbi Sav Circu Mite Jig S Recip Chai Cut

#### Cutt Cut-

2

4

6

8

10

12

14

15

16

19

19

21

24

25

26

27

28

29

30

31

32

33

34

36

43 48

51

51

#### Pla Plan

#### Rout Trim

### Pre

Pressure Washer	
Pressure Washer	
Misselleneurs	

### Mi

<b>Miscellenous</b> Shear Nibbler Blower	72 73 73	Polishing & Sanding
Mixer Heat Gun Compressor	73 73 74 75	Sawing

Drilling

**Battery** Battery

Charger

Charger

Introduction

**Technologies** 

**Impact Driver Drill** 

Cordless

**Driver Drill** 

Impact Driver

Impact Wrench

**Multivolt Driver Drill** 

**Multivolt Driver Drill** 

Multivolt Impact Driver

**Multivolt Impact Driver** 

**Multivolt Rotary Hammer** Multivolt Impact Wrench

**Multivolt Impact Wrench** 

**Multivolt Impact Driver Drill** 

**General Information** 

**Innovative Highlights** 

100 mm Disc Grinder with Slide Switch

125 mm Disc Grinder with Slide Switch

Multivolt Disc Grinder with Slide Switch

Multivolt Disc Grinder with Slide Switch

Contents

Index

Drill Impact Drill	39 40
Tool Kit 10mm Tool Kit	41
13mm Tool Kit	41

### **Demolition**

Rotary Hammer	
Demolition Hammer	

#### Fastening

Screw Driver	
Impact Wrench	

Planing & Routing Miscellaneous

LIZZOVI

Cordless

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

Cutting

General information. Good to know before reading.



Cordless

Chargers/ Batteries

Drilling

Demolition

astening

Grinding

Polishing & Sanding

Sawing

Cutting

Planing & Routing

#### Safety

Double-Insulation power tool, indicated by the double square mark ( ) can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

#### **General precautions**

- Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
- 2. Never let children use the power tool.
- 3. Keep others, especially children, away from the tool.
- 4. Wear eye protector to protect the eyes.
- 5. Never touch blades or cutters during operation.
- 6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
- 7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
- 8. Prior to operation, carefully inspect the tool to ensure all the parts properly functioning.
- 9. Immediately stop operation if abnormalities are noted.
- 10. Ensure that motor ventilation opening is kept fully open.
- 11. Always keep the blades and cutters sharp and clean.
- 12. Have the power tool inspected at a proper regular interval by an authorized Service Center.
- 13. Maintain the proper care and cleanliness of the power tool.
- 14. Consult an authorised Service Center for repair and/or part replacement.
- 15. DO NOT use the power tool for any other application than those specified in the handling instructions.
- 16. DO NOT use the tool for work beyond its prescribed capability.
- 17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
- 18. Ensure that the applied voltage is the same as that specified on the nameplate.
- 19. Ensure that electric plug is plugged into a matching receptacle hat is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
- 20. Ensure that the power supply is disconnected after operation.
- 21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
- 22. Always handle the power tool with care.
- 23. Proper posture is essential for safe operation.
- 24. Dress properly and work in proper clothing and shoes.
- 25. Always keep the work area in good order.
- 26. When not in use, store the power tool.
- 27. DO NOT stare into LASER beam.


#### **Power input**

HiKOKI power tools employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110V to 240V.

#### Guarantee

The primary concern of Koki Holdings is the convenience and satisfaction of the customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials. Defects in workmanship and materials – not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling — will be repaired or replaced without charge.

#### lcons

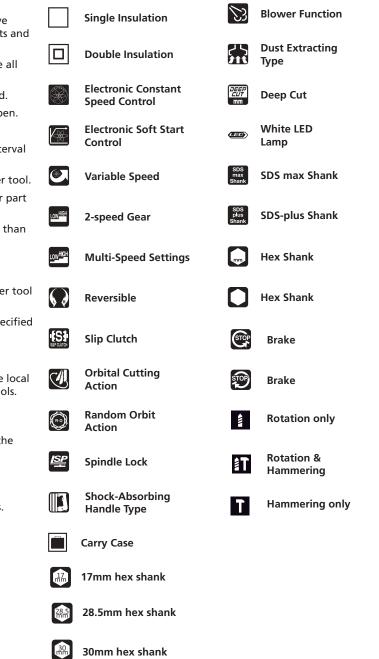

# INDEX

#### Α

AW 100 AW 130 AW 150	Pressure Washer Pressure Washer Pressure Washer	71 71 72
В		
BSL 1220M	Battery	37
BSL 1240M	Battery	36
BSL 1820M	Battery	36
BSL 1840M	Battery	36
BSL 1850MA	Battery	36
BSL 36A18	Battery	37

### C

DS 36DA

C 10FCE2	Miter Saw	64
C 12FDHB	Miter Saw	64
C 7SS	Circular Saw	63
C 7ST	Circular Saw	63
C 9SA3	Circular Saw	63
CC 14STA	Cut-off Machine	68
CC 14STD	Cut-off Machine	68
CC 14STDU	Cut-off Machine	68
CE 16SA	Shear	72
CJ 160V	Jig Saw	65
CJ 90VST2	Jig Saw	65
CM 4SB2	Cutter	67
CM 4ST	Cutter	67
CN 16SA	Nibbler	73
CR 13V2	Reciprocating Saw	66
CS 40Y	Chain Saw	67
D		
D 10VST	Drill	39
D 10VSTA	Drill	39
D 13VH	Drill	39
DB 10DL	<b>Cordless Driver Drill</b>	14
DB 3DL2	Cordless Driver Drill	14
DH 22PBS	Rotary Hammer	43
DH 24PG2	Rotary Hammer	43
DH 26PB2	Rotary Hammer	43
DH 26PC2	Rotary Hammer	44
DH 28PBY2	Rotary Hammer	44
DH 28PCY2	Rotary Hammer	44
DH 36DPA	Cordless Rotary	29
	Hammer	
DH 40MC	Rotary Hammer	45
DH 45MA	Rotary Hammer	45
DH 45ME	Rotary Hammer	45
DH 52ME	Rotary Hammer	46
DS 12DA	<b>Cordless Driver Drill</b>	14
DS 18DA	Cordless Driver Drill	15

**Cordless Driver Drill** 

24

DS 36DC	Cordless Driver Drill	25
DV 10VST	Impact Drill	40
DV 12DA	Cordless Impact	15
	Driver Drill	
DV 13VSS	Impact Drill	40
DV 15V55		40
	Impact Drill	
DV 18DA	Cordless Impact	16
	Driver Drill	
DV 36DA	Cordless Impact	26
	Driver Drill	
E		
EC 68	Compressor	75
	Compressor	/ 3
e		
<u>F</u>		
FCJ 65V3	Jig Saw	65
FSV 10SA	Orbital Sander	60
G		
G 10SN2	Disc Grinder	53
G 10SR4	Disc Grinder	53
G 10SS2	Disc Grinder	53
G 10VE2	Disc Grinder	54
G 13SB4	Disc Grinder	55
G 13SR4	Disc Grinder	54
G 13SW	Disc Grinder	55
G 155A2	Disc Grinder	55
G 1810DA	Cordless 100 mm	19
G ISTUDA		19
	Disc Grinder with	
	Slide Switch	
G 1813DA	Cordless 125 mm	19
	Disc Grinder with	
	Slide Switch	
G 18BYE	Disc Grinder	56
G 18SE4	Disc Grinder	57
G 18SH2	Disc Grinder	56
G 18ST	Disc Grinder	56
G 18SW2	Disc Grinder	57
G 23SC4	Disc Grinder	58
G 23ST	Disc Grinder	57
G 3610DA	Cordless Disc Grinder	32
GJUIUDA	with Slide Switch	52
G 3618DA	Cordless Disc Grinder	33
G 3018DA		55
CD 262	with Slide Switch	50
GP 2S2	Hand Grinder	58
GP 3V	Hand Grinder	58
H		
H 60ME	Demolition Hammer	49
H 65SB3	Demolition Hammer	49
H 90SG	Demolition Hammer	50
H41 MB2	Demolition Hammer	48
		40

# INDEX



H41 SST H60 MC (V)	Demolition Hammer Demolition Hammer	48 48
Μ		
M 12SA2	Router	70
M 12SC	Router	70
M 6ST	Trimmer	70
Р		
P 20ST	Planer	68
PDA-100M	Disc Grinder	53
PDA-125M	Disc Grinder	54
PH 65A	Demolition Hammer	49
R		
RB 40SA	Blower	73
RH 600T	Heat Gun	74
RH 650V	Heat Gun	74
S		
S 15SB	Sander Polisher	60
SAT 180	Sander Polisher	60
SB 8V2	Orbital Sander	61
SP 18VA	Sander Polisher	60
SV 12SG	Orbital Sander	61
SV 13YA	Orbital Sander	61
т		
Tool Kit 10mm		41
Tool Kit 13mm		41

U			0
UC 10SL2	Charger	35	Cordless
UC 12SL	Charger	34	Ŭ.
UC 18YFSL	Charger	34	
UC 18YG	Charger	34	망우
UC 18YGL2	Charger	34	Chargers, Batteries
UC 18YRL	Charger	34	ies/
UC 18YSL3	Charger	35	
UC 3SFL	Charger	35	
UC 7SL	Charger	35	Drilling
UM 12VST2	Mixer	73	ling
UM 16VST2	Mixer	74	
V		_	Der
VTP 18	Impact Drill	40	Demolition
W			on
W 6VA4	Screw Driver	51	Fas
WH 12DA	Cordless Impact		Fastening
	Driver	17	Ð
WH 12DD	Cordless Impact	-	
	Driver	17	G
WH 18DA	Cordless Impact Driver	17	Grinding
WH 18DC	Cordless Impact		ng
	Driver Drill	18	
WH 18DE	<b>Cordless Impact Driver</b>	18	P
WH 36DB	Cordless Impact Driver	27	olishing Sanding
WH 36DC	Cordless Impact Driver	28	Polishing & Sanding
WH 7DL	Cordless Impact Driver	16	Qo
WR 18DF	Cordless Impact Wrench	21	
WR 18DSDL	Cordless Impact Wrench	21	Sa
WR 22SE	Impact Wrench	51	Sawing
WR 25SE	Impact Wrench	51	Ð
WR 36DF	Cordless Impact Wrench	30	
WR 36DG	Cordless Impact Wrench	31	Cutting

Miscellaneous

Planing & Routing

Pneumatic



At HiKOKI we believe that not only the design and overall look and feel of each power tool contributes to an increased comfort and ease of use. It's the technology inside that makes the next power tool and job for the professional even better than before.

## BRUSHLESS

Due to the more compact designs compared to brushed motors, the brushless motors permit reductions in size and weight of tools for easier handling. Even under heavy use, the brushless motors significantly extend the product life cycles without causing troubles such as armature burnout, layer short or commutator wear. Plus, they do not require the regular replacement of carbon brushes.



One battery pack, two volt classes - the new and innovative MULTI VOLT battery packs. The 36V Lithium-ion battery packs are compatible with 18V class cordless tools. Intelligent connecting technology make it possible. Depending on the tool, the voltage automatically switches to 18V or 36V.

# 

The new compact and lightweight 10.8 - 12V Peak slide Lithium-ion battery packs are compatible with the new 10.8 - 12V Peak cordless tools.

# Li-ion

A built in electronic control circuit for Lithium-ion battery pack is unique. This circuit provides the protection system available to protect and enhance the performance of these batteries. By always keeping the batteries within safe operating conditions, this electronic control ensures that batteries accept more charges than conventional batteries.



UVP (User Vibration Protection) combines internal vibration absorbers and shock absorbing handles for reduced vibration, and improved operating efficiency.



LVH (Low Vibration Handle) consists of the upper unit with rubber dampers and the lower unit with a hinge to reduce vibration and user fatigue.



International Protection (IP) is a standard developed by the International Electrotechnical Commission (IEC) to indicate the degrees of protection provided by enclosures of electrical equipment against access to hazardous parts, ingress of solid foreign objects and ingress of water.



The internal double-insulation construction with an aluminum die-cast body and a plastic stator holder.



When the tool bit is suddenly overburdened during operation, RFC (Reactive Force Control) stops the motor to reduce twisting of the main unit.



The triple hammer has three anvils, making three impacts per rotation instead of the conventional two. This results in reduced vibration and greater comfort with less screw head slippage (cam-out).



Oil Pulse impact drivers use a hydraulic pressure system to generate impact force resulting in high performance with low-noise, low kick-back and reduced cam-out.



A built-in acceleration sensor detects when the tool is tilted and notifies the user to adjust the angle of the tool to achieve a vertical hole  $(+/-5^{\circ})$  and increase drilling efficiency.



The XACT CUT LED lighting system uses an LED light to cast a shadow where the blade will cut on the material for precise and efficient cutting.



The Air Spring Drive System uses compressed air to drive each nail providing a pneumatic-like feel and resulting in powerful driving force, quick response, consistent driving depth, and low recoil.

# BRUSHLESS

# AC Brushless Motor series Long-lasting efficiency.

The professional no longer has to worry about losing voltage and power when using an extension cord. Our AC Brushless Motor series feature electronic control that offers continuous and constant power output. This technology brings a whole new level of performance and durability to our heavy duty range of power tools. With the innovative AC Brushless Motor you'll experience more power and less energy consumption.

We have also eliminated some major wearing parts, which means a compact and lightweight power tool, less wear and tear and less maintenance. This also contributes to the fact that the motor lasts longer and operates far more efficiently than conventional brushed motors.

# Ηίκοκι

61.

# **CORDLESS TOOLS**



MRP: ₹ 15,660/-



Variable Speed

	Specifications		
Drill Chuck 0.8-10mm Keyless		SS	
		Mild Steel	10mm
	Conocity	Soft Wood	29mm
	Capacity	Wood Screw	5.8mm
		Machine Screw	6mm
	Battery Voltage 10.8-12V Peak		
	No. Lond Crossel	High	0-1,400/min
	No Load Speed	Low	0-350/min
	Max Torque Hard		38Nm
	Max Torque Soft		15Nm
	Torque Setting 0.6-4.0Nm		
	Overall Length	166mm	
	1.1kg with BSL		225M/BSL1215
	Weight	1.2kg with BSL1240M	
	Standard Accessories*	2 Batteries (BSL1225M), Charge (UC12SL), Battery Cover, Carryi Case	

MRP: ₹ 20,000/-

\*Standard accessories may vary by country or area

Brake

Miscellaneous

Pneumatic

NEW

## HíKOKI

18

HIKOKI

20-

HIKOKI

#### **DS 18DA**

**18V Cordless Driver Drill** 



#### **Features**

- Compact and lightweight •
- High capacity battery with battery level indicator .
- 20 Stage clutch
- 2 Speed gear

	Specifications	
Drill Chuck	2.0-13mm Keyless	
	Mild Steel	13mm
Conositu	Soft Wood	36mm
Capacity	Wood Screw (D X L)	6 x 75mm
	Machine Screw	6mm
Battery Voltage	18V	
No Lood Speed	High	0-1,400/min
No Load Speed	Low	0-350/min
Max Torque Hard	Max Torque Hard	
Max Torque Soft		18Nm
Overall Length	173mm	
Weight	Kg	1.3kg (BSL1820M), 1.9kg (BSL36B18)
Standard Accessories*	2 Batteries (BSL1820M), Charger (UC18YKSL / UC18YSL3), Driver Bit, Battery Cover, Carrying Case	

\*Standard accessories may vary by country or area

MRP: ₹ 17,500/-

STOP



LED Light

STOP

	Specificati	ions
Drill Chuck	0.8-10mm Keyle	SS
	Brick	8mm
	Steel	10mm
Capacity	Wood	29mm
	Wood Screw	5.8mm
	Machine Screw	6mm
Battery Voltage	10.8-12V Peak	
	High	0-1,400/min
No Load Speed	Low	0-350/min
and a st Data	High	0-21,000/min
mpact Rate	Low	0-5,250/min
Max Torque Hard		38Nm
Max Torque Soft		15Nm
Torque Setting		0.6-4.0Nm
Overall Length		181mm
Weight	1.2kg with BSL1 BSL1240M Batte	225M/ BSL1215, 1.3kg with ery
Standard Accessories*	2 Batteries (BSL1225M), Charger (UC12SL), Battery Cover, Carrying Case	

#### MRP: ₹ 21,930/-

\*Standard accessories may vary by country or area

**(** 



#### CORDLESS IMPACT DRIVER DRILLS / IMPACT DRIVER



Standard 2 Batteries (BSL1820M), Charger (UC18YKSL), Driver Bit, Battery Cover, Carrying Case Accessories\*

Impact Rate

Max Torque

Weight

**Overall Length** 

High

Low

Hard

Soft

188mm

\*Standard accessories may vary by country or area

MRP: ₹ 20,000/-

LOWHIGH

STOP

0-21,000/min

0-5,250/min

50Nm

18Nm

1.4kg (BSL1820M), 2.0kg (BSL36B18)



	Specifica	tions	
	Bolt	3-8mm	
Capacity	High Tension Bolt	3-6mm	
	Small Screw	3-8mm	
Drive	6.35mm Hex Bi	t Shank	
Tightening Torqu	e	25Nm	
Battery Voltage		7.2V	
No Load Speed		0-2,400/min	
Full Load Impact I	Rate	0-3,000/min	
Overall Length	Straight	282mm	
Overall Length	L shape	211mm	
Weight		0.59kg	
Standard	Batteries (BCL7	15), Charger (UC7SL), Battery	
Accessories*	Cover, Carrying Case		

MRP: ₹ 16,140/-

\*Standard accessories may vary by country or area

# Chargers/ Batteries

# Drilling

STOP

STOP

#### **CORDLESS IMPACT DRIVER**



\*Standard accessories may vary by country or area

#### **WH 12DA**

10.8-12V Peak Cordless Impact Driver



#### Features

- Slim handle with soft grip
- LED light

**WH 12DD** 

10.8-12V Peak

**12V**PEAK

Li-ion

LED Light

**Features** 

•

• Compact & light weight

**Cordless Impact Driver** 

BRUSHLESS

134mm compact head

(soft/power/self-drilling screw)

3 tightening modes

	Specifications		
	Bolt	5-12mm	
Capacity	High Tension Bolt	5-10mm	
	Small Screw	4-8mm	
Drive	6.35mm Hex Bit Sh	ank	
Tightening Torque		110Nm	
Battery Voltage		10.8-12V Peak	
No Load Speed		0-2,700/min	
Full Load Impact F	late	0-3,200/min	
Overall Length	150mm		
Weight	1.1kg (with BSL1225M / BSL1215) - 1.2kg (with BSL1240M)		
Standard Accessories*	2 Batteries (BSL1220M / BSL1225M), Charger (UC12SL), Driver Bit, Carrying Case		

#### MRP: ₹ 10,000/-(Bare Tool)

**(** 

 $\mathbf{O}$ 

STOP

**Specifications** Bolt 5-14mm High Tension Bolt 5-12mm Capacity Small Screw 4-8mm Self drilling Screw 3.5-5mm Drive 6.35mm Hex Bit Shank 135Nm **Tightening Torque Battery Voltage** 10.8-12V Peak Power Mode 0-3,200/min No Load Speed Soft Mode 0-1,300/min Self Drilling Screw Mode 0-3,200/min Power Mode 0-4,000/min Impact Rate Soft Mode 0-2,500/min Self Drilling Screw Mode 0-4,000/min 6 **Overall Length** 134mm Weight 1.1kg 2 Batteries (BSL1240M), Charger (UC12SL), Standard STOP Accessories\* Battery Cover, Carrying Case \*Standard accessories may vary by country or area

#### MRP: ₹ 22,000/-

WH 18DA
18V
Cordless Impact Driver

Li-ion

#### Features

- Compact and lightweight
- High capacity battery with battery level indicator
- LED light
- Easy to use in tight spaces

Brake



	Machine Screw	4 - 8mm
Capacity	Bolt	M5 - M14
	High Tension Bolt	M5 - M12
Tightening Torque	140Nm	
Battery Voltage	18V	
No Load Speed	0 - 2,700/min	
Impact Rate	0 - 3,600/min	
Overall Length	150mm	
Weight	1.3kg (with BSL1820M BSL36B18)	)- 1.9kg (with
Standard	2 Batteries (BSL1820M	
Accessories*	UC18YKSL), Battery Co	over, Carrying Case

**Specifications** 

# Cordless

\*Standard accessories may vary by country or area

#### **WH 18DC**

#### **18V Cordless Impact Driver**



#### **Features**

- Bright 3 LEDs working light
- Powerful brushless motor delivers fast tightening speed.
- 5 Tightening modes with Triple Hammer
- IP56 dust & water resistance

	Specifications	
	Small Screw	4 - 10mm
Conositu	Ordinary Bolt	5 - 18mm
Capacity	High Strength Bolt	5 - 14mm
	Self Drilling Screw	ø3.5 - ø6mm
Drive	6.35mm	
Max. Tightening Torque	210Nm	
Battery Voltage	18V	
	Soft Mode	0 - 900/min
	Power Mode	0 - 3,400/min
No Load Speed	Bolt Mode	0 - 2,900/min
No Load Speed	Bolt Single Mode	0 - 2,900/min
	Self Drilling Screw Mode	0 - 3,700/min
	Soft Mode	0 -1,900/min
	Power Mode	0 - 4,000/min
Impact Rate	Bolt Mode	0 - 4,000/min
impact Nate	Bolt Single Mode	0 - 4,000/min
	Self Drilling Screw Mode	0 - 2,100/min
Overall Length	114mm	
Weight	1.6kg (BSL36A18), 1.	9kg (BSL36B18)
Standard Accessories*	2 Batteries (BSL36A1 (UC18YSL3), Battery Carrying Case	

\*Standard accessories may vary by country or area

**WH 18DE** 

Li-ion

**Features** 

switch

Brake

**(** 

18V

NEW **Cordless Impact Driver** BAUSHLESS Compact, simple and easy to use Stays running at low speeds and are suitable for delicate work Highly responsive trigger

MRP: ₹ 42,500/-

	Specifications	
	Small Screw	4 - 8mm
Capacity	Ordinary Bolt	5 - 16mm
	High Strength Bolt	5 - 12mm
Drive		6.35mm
Tightening To	orque	175Nm
Battery Volta	ge	18V
No Load Spee	ed	0 - 3,100/min
Impact Rate		0 - 3,400/min
Overall Lengt	:h	120mm
Weight	1.5kg (BSL1840M) 1.6kg 1.9kg (BSL36B18)	g (BSL1850MA)
Standard	Batteries (BSL1840M), (	Charger (UC18YSL3)
Accessories*	Hook, Battery Cover, Ca	arrying Case

\*Standard accessories may vary by country or area

#### MRP: ₹ 18,400/- (Bare Tool)

BRUSHLESS

Li-ion IP56

TRIPLE HAMMER

Cordless

Cutting

Planing & Routing



Variable Speed



Sawing

Cutting

Planing & Routing

Miscellaneous

Pneumatic

<b>G 1810DA</b> 18V Cordless 100 mm Disc Grinder with Slide				Cordless
Switch				
65		Snor	ifications	Chargers/ Batteries
		Wheel Dia	100mm	rger terie
A STATE OF S	Capacity	Hole Dia	16mm	5 5
Li-ion		Thickness	6mm	
	Spindle Thread	M10 x 1.5	1	
BRUSHLESS	Battery Voltage	18V		Drilling
Features	No Load Speed	8,000/min		ling
750W max output	Overall Length	358mm		
Small grip circumference	Weight	2.4kg (with 2.8kg (with	BSL1850MA) BSL36B18)	
<ul> <li>Easy to maintain mesh dust filter</li> <li>Kickback protection</li> </ul>	Standard Accessories*	(UC18YSL3),	BSL1850MA), Charger Side Handle, Depressed Center nch, Battery Cover, Carrying Case	Demolition
Restart protection			*Standard accessories may vary by country or area	
G 1813DA NEW	MRP: ₹ 35,	200/-		Fastening
18V Cordless 125 mm				
Disc Grinder with Slide				Grinding
Switch		Spec	fications	ing
		Wheel Dia	125mm	
College States	Capacity	Hole Dia	22.23mm	
		Thickness	6mm	Poli Sa
Li-ion	Spindle Thread	M14 x 2		Polishing & Sanding
	Battery Voltage	18V		gu 8
BRUSHLESS	No Load Speed	8,000/min		~
Features	Overall Length	358mm		
• 750W max output	Weight	2.7kg (with 3.1kg (with	BSL1850MA) BSL36B18)	Saw

- Small grip circumference •
- Easy to maintain mesh dust filter •
- **Kickback protection** •
- **Restart protection** •

	Specific	ations	
	Wheel Dia	125mm	
Capacity	Hole Dia	22.23mm	-
	Thickness	6mm	
Spindle Thread	M14 x 2		
Battery Voltage	18V		
No Load Speed	8,000/min		
Overall Length	358mm		-
Weight		-	
Standard Accessories*	(UC18YSL3), Si	de Handle, Depressed Center	
L		*Standard accessories may vary by country or area	I.
	Spindle Thread Battery Voltage No Load Speed Overall Length Weight Standard	Capacity Wheel Dia Hole Dia Thickness Spindle Thread M14 x 2 Battery Voltage 18V No Load Speed 8,000/min Overall Length 358mm Weight 2.7kg (with BS 3.1kg (with BS Standard Accessories* UC18YSL3), Si Wheel, Wrencl Case	CapacityHole Dia22.23mmHole Dia22.23mmThickness6mmSpindle ThreadM14 x 2Battery Voltage18VNo Load Speed8,000/minOverall Length358mmWeight2.7kg (with BSL1850MA) 3.1kg (with BSL36B18)Standard Accessories*2 Batteries (BSL1850MA), Charger (UC18YSL3), Side Handle, Depressed Center Wheel, Wrench, Battery Cover, Carrying Case

MRP: ₹ 37,200/-



(A)

<u>ISP</u>

**Electronic Soft Start** Control



Spindle Lock



# ΗίΚΟΚΙ

Li-ion

### **WR 18DF**

**18V Cordless Impact Wrench** 



#### **Features**

- Powerful with a max torque of • 220Nm
- High capacity battery with battery level indicator
- LED light



	Specific	ations
Conscitu	Bolt	M10-M16
Capacity	High Tensior	n Bolt M8-M14
Square Drive	12.7mm	
Tightening To	rque 220Nm	
Battery Voltag	ge 18V	
No Load Spee	d 0-2,400/min	
Impact Rate	0-3,200/min	
Overall Lengt	h 177mm	
Weight	1.4kg	
Standard Accessories*		BSL1820M), Charger Battery Cover, Carrying Case
MRP· ₹ 12	*	Standard accessories may vary by country or a

MRP: ₹ 13,000/-(Bare Tool)

R 18DSDL		Specifications	
/ Cordless	Conscitu	Bolt	M10-M18
pact Wrench	Capacity	High Tension Bolt	M8-M14
	Square Drive	12.7mm	
999054 W	Tightening	Power Mode	255Nm
	Torque	Save Mode	140Nm
i-ion <sup>Sq</sup>	Battery Voltage	1	18V
		Power Mode	0-2,600/min
12./mm	No Load Speed	Save Mode	0-2,000/min
	Full Load Impa		0-2,000/min 0-3,200/min
es	V		
es mode or Power mode	Full Load Impac	t Rate	0-3,200/min
es mode or Power mode or the	Full Load Impac Overall Length Weight	t Rate 173mm	0-3,200/min 2.1kg (with BSL1850
ode or Power mode	Full Load Impac Overall Length	t Rate 173mm 1.5kg (with BSL1830C)-	0-3,200/min 2.1kg (with BSL1850 BSL1850), Charger

#### MRP: ₹ 34,000/-



- Tightening torque 255Nm •

Cordless



Brake

Reversible





# MULTI VOLT battery system AC POWER. DC FREEDOM.

A new generation battery system (BSL36A18), with almost the same size and weight as our 18V 5.0Ah/6.0Ah battery, but it's the technology inside that provides you with the great improvements you need. Doubling voltage provides the optimal power for the MULTI VOLT 36V tools, without the hassle of cords. The MULTI VOLT batteries are compatible with a wide range of 18V cordless tools, which means you can easily switch from one power tool to another. So you're just a simple click away from maximum performance.






## COMPATIBILITY

- One Battery Two Voltages (36V / 18V)
- Backward Compatible with HiKOKI 18V tools

The MV battery platform is compatible with both 36V and 18V tools, and it automatically changes between the two voltages according to the tool used. Having to use different batteries and changes for different tools can be very cumbersome and inconvenient. MV users need only one battery to use both 18V and 36V tools, which saves all the hassle.

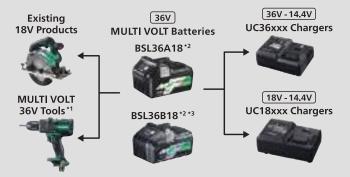

## **OUTSTANDING POWER**

• 36V Nominal Voltage. Up to 41V after Charging.

The MULTI VOLT 36V battery platform boasts a high power output, with the maximum voltage reaching as high as 41V right after charging. The MULTI VOLT batteries deliver the power to increase productivity and efficiency.

## **ALL DAY RUNTIME**

MULTI VOLT gives you the choice to operate MULTI VOLT tools either cordless with a MULTI VOLT 36V battery or corded with the MULTIVOLT AC Adapter. When a power outlet is available, you can choose to use the AC adapter for unlimited runtime.





#### BSL36A18 / BSL36B18 MULTI VOLT Battery

Model	BSL36A18	BSL36B18
Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah (dual voltage)	36V - 4.0Ah / 18V - 8.0Ah (dual voltage)
<b>Cooling System</b>	Yes	
Dimensions (L x H x W)	116 x 69 x 76mm	134 x 75 x 83mm
Charging Time	Approx. 32min. (When using the UC18YSL3 charger)	Approx. 52min. (When using the UC18YSL3 charger)
Compatible	18V	Existing 18V slide-type tools
Products	36V	MULTI VOLT 36V tools
Compatible Charger	All chargers compatible with 14.4-36V slide-type Lithium-ion batteries	

## GREAT PERFORMANCE IN COLD WEATHER

The MULTI VOLT batteries are guaranteed to work at a temperature as low as  $-10^{\circ}$ C, providing you with peace of mind when you work in cold weather.

Cordless

-astening

Pneumatic

#### **MULTI VOLT**

**DS 36DA** 

**MULTI VOLT 36V** 

**Cordless Driver Drill** 

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

Polishing & Sanding

Sawing

Cutting

Planing & Routing

Miscellaneous

Pneumatic

24 🞯

## **CORDLESS DRIVER** DRILLS



**Higher Drilling Capacity** and Greater Versatility with **MULTI VOLT Battery** 

Li-ion BRUSHLESS

#### **Features**

- Feedback speed control for more • stable handling
- Robust aluminium gear case •
- 22-stage adjustable clutch •
- Large double molded clutch dial is • easy to grip and read
- IP56 dust & water resistance

	Specification	S	
Drill Chuck	1.5-13mm Keyless		
	Mild Steel	16mm	
Comonita	Soft Wood	102mm	
Capacity	Wood Screw	12x100mm	
	Machine Screw	6mm	
Battery Voltage	36V	36V	
No Load Speed	High	0–2,100/min	
	Low	0–500/min	
Max Torque Hard	138Nm		
Max Torque Soft	64Nm		
Torque Setting	2–8Nm	2–8Nm	
Overall Length	204mm		
Weight	2.7kg - 3.0kg		
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Driver Bit, Battery Cover, Carrying Case		

\*Standard accessories may vary by country or area

MRP: ₹ 55,500/-

<u>کی</u>

Brake

Variable Speed



HIKOKI



# **CORDLESS DRIVER** DRILLS

**DS 36DC MULTI VOLT 36V Cordless Driver Drill** 





#### **Features**

- Powerful enough to drill 36mm holes • easily
- Continuously drives thick and long screws fast
- 190mm compact head •
- Side handle is easy to use and easily • adjustable at 11 different positions

	Specification	s	
Drill Chuck	1.5-13mm Keyless		
	Mild Steel	20mm	
Conscitu	Soft Wood	118mm	
Capacity	Wood Screw	16x100mm	
	Machine Screw	6mm	
Battery Voltage	36V		
No Load Speed	High	0–2,200/min	
	Low	0–550/min	
Max Torque Hard	155Nm		
Max Torque Soft	100Nm		
Overall Length	190mm		1
Weight	2.8kg (with BSL36A18)		
weight	3.1kg (with BSL36B18)		
Standard	2 Batteries (BSL36A18), Charger		
Accessories*	(UC18YSL3), Side Handle, Hook, Driver		(
Bit, Battery Cover, Carrying Case			

\*Standard accessories may vary by country or area

<u>رچ</u>

Variable Speed

STOP

Brake

MRP: ₹ 48,000/-



 $\left( \right)$ 

#### **MULTI VOLT**

Cordless

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

# **CORDLESS IMPACT DRIVER DRILLS**

**DV 36DA** 

**MULTI VOLT 36V Cordless** Impact Driver Drill



# ΓΙ VOI Τ

**Higher Drilling Capacity** and Greater Versatility with **MULTI VOLT Battery** 

#### **Features**

**Drill Chuck** 

- Feedback speed control for more • stable handling
- Robust aluminium gear case •
- 22-stage adjustable clutch •
- Large double-molded clutch dial is • easy to grip and read

Brick

Polishing & Sanding

Sawing

Cutting

Planing & Routing

Miscellaneous

Pneumatic

Mild Steel 16mm Soft Wood 102mm Capacity Wood Screw 12x100mm Machine 6mm Screw **Battery Voltage** 36V 0-2,100/min High No Load Speed Low 0-500/min 0-31,500/min High Impact Rate 0-7,500/min Low Max Torque Hard 138Nm Max Torque Soft 64Nm **Torque Setting** 2-8Nm Overall Length 204mm Weight 2.7kg-3.0kg 2 Batteries (BSL36A18), Charger (UC18YSL3), Standard Side Handle, Driver Bit, Battery Cover, Accessories\* **Carrying Case** \*Standard accessories may vary by country or area

**Specifications** 

20mm

1.5–13mm Keyless

LOWHIGH STOP

HEROK

.

Brake

MRP: ₹ 60,000/-

STOP



**Features** 

•

•

•

Capacity

Drive

**Tightening Torque** 

**Battery Voltage** 

No Load Speed

Impact Rate

**Overall Length** 

Weight

Standard

Accessories\*

CORDLESS IMPACT DRIVER

Li-ion BAUSHLESS

Triple Hammer mechanism has three strikers

4-step tightening mode selector for a variety

Well-balanced weight distribution for better

**Specifications** 

High Tension

Self Drilling

Power Mode

Soft Mode

Self Drilling

Screw Mode

Power Mode

Normal Mode

Soft Mode

Self Drilling

Screw Mode

1.6kg-1.9kg

127mm

Case

( )

Normal Mode

Machine Screw

6.35mm Hex Bit Shank

5-18mm

5-14mm

4-10mm

3.5-6mm

0-2,900/min

0-2,900/min

0-2,900/min

0-4,100/min 0-4,100/min

0-2,000/min

0-2,200/min

0-900/min

of jobs from delicate to heavy duty work Newly designed airflow system for optimal

making three impacts per rotation instead of the usual two, reducing vibration and vastly

WH 36DB MULTI VOLT 36V Cordless Impact Driver

improving user comfort

IP56 dust & water resistance

Bolt

Bolt

Screw

210Nm

36V

cooling efficiency

work efficiency





## MULTI VOLT High-Speed Fastening throughout the Battery Charge

IKOK

*Standard accessories may vary by country or area
---

MRP: ₹ 52,500/-

STOP



2Batteries (BSL36A18), Charger

(UC18YSL3), Battery Cover, Carrying

STOP Brake

27

#### **MULTI VOLT**

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

Sanding

Sawing

Cutting

Routing

Miscellaneous

## CORDLESS IMPACT DRIVER

WH 36DC MULTI VOLT 36V Cordless Impact Driver





#### Features

- Compact head and lightweight design
- 5 tightening modes for various applications
- Triple LED lights for superior visibility
- IP56 dust & water resistance

	Specifications		
	Small Screw	4 - 10mm	
Conseitu	Ordinary Bolt	5-18mm	
Capacity	High Tension Bolt	5-14mm	
	Self Drilling Screw	ø3.5-ø6mm	
Drive	6.35mm Hex Bit Sha	nk	
Max. Tightening Torque	215Nm	215Nm	
Battery Voltage	36V		
	Soft Mode	0-900/min	
	Power Mode	0-3,400/min	
No Load Speed	Bolt Mode	0-2,900/min	
NO LOAU Speeu	Bolt Single Mode	0-2,900/min	
	Self Drilling Screw Mode	0-3,700/min	
	Soft Mode	0-2,000/min	
	Power Mode	0-4,100/min	
Impact Rate	Bolt Mode	0-4,100/min	
impact Nate	Bolt Single Mode	0-4,100/min	
	Self Drilling Screw Mode	0-2,200/min	
Overall Length	114mm		
Weight	1.6kg		
Standard	2 Batteries (BSL36A18), Charger		
Accessories*	(UC18YSL3), Battery Cover, Carrying Case		





\*Standard accessories may vary by country or area

MRP: ₹ 17,340/-(Bare Tool) STOP

28

Reversible





# CORDLESS ROTARY HAMMER

## DH 36DPA

Li-ion

MULTI VOLT 36V Cordless Rotary Hammer

BRUSHLESS



HIKOK

Drilling

## Features

- Faster drilling speed like an electric model
- Ergonomic design for improved handling
- Multiple bit-angle settings
- Compatible with optional dust extractor system

	Specificatio	ons	
	Concrete	28mm	
Capacity	Steel	13mm	
	Wood	32mm	
Bit Shank	SDS-plus		
Battery Voltage	36V		
No Load Speed	0-1,100/min		
Full Load Impact Rate	0-4,300/min		
Overall Length	351mm		
Weight	3.9kg		
Standard Accessories*	2 Batteries (BSL36A18), Battery Cover, Charger (UC18YSL3), Side Handle, Depth		
	Gauge, Termi	nal Cover, Carrying Case	

\*Standard accessories may vary by country or area

MRP: ₹ 71,250/-



 $\left( \right)$ 

Reversible

SDS plus SDS-plus Shank

#### **MULTI VOLT**







\* Above image is for illustration purpose only.

\*Standard accessories may vary by country or area

MRP: ₹ 52,000/-

30 💌



STO

Brake



## CORDLESS IMPACT WRENCH

WR 36DG NEW MULTI VOLT 36V Cordless Impact Wrench





# MULTI VOLT

li KOKI

#### Features

- 1,400Nm Tightening Torque
- 2,000Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening mode selector
- IP56 Dust and Water Resistant\*
- Powered by 36V High Performance brushless motor
- Bright LED light

	Specifications	
Conscitu	Bolt	M12–M33
Capacity	High Tension Bolt	M10–M24
Square Drive	12.7mm	
Tightening Torque	1,400Nm	
Nut Busting Torque	2,000Nm	
Battery Voltage	36V	
	Mode 4	0–1,500/min
No Load Spood	Mode 3	0–1,200/min
No Load Speed	Mode 2	0-900/min
	Mode 1	0–600/min
	Mode 4	0–2,500/min
Full Impact Pata	Mode 3	0–2,200/min
Full Impact Rate	Mode 2	0–1,900/min
	Mode 1	0–1,600/min
Overall Length	221mm	
Weight	3.9kg (BSL36A18)	
Standard Accessories*	Charger (UC 18YSL3), Battery (BSL36A18) - 2 Nos, stackable case, battery cover.	

\*Standard accessories may vary by country or area

MRP: ₹ 53,000/-

STOP



STOP





#### **MULTI VOLT**

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

Polishing & Sanding

Sawing

# **CORDLESS DISC GRINDER**



#### G 3610DA

**MULTI VOLT 36V Cordless Disc Grinder** with Slide Switch



#### **Features**

Li-ion

- Faster grinding & cutting speed •
- 146mm grip circumference .
- Auto Mode adjusts the speed automatically between high and low speeds depending on the load
- Electronic brake stops the wheel in less than 2 seconds •
- Kickback protection system •
- Anti-restart protection
- Variable speed control

	Specificat	ions
Conscitu	Wheel Dia.	100mm
Capacity	Hole Dia.	16mm
Spindle Thread	M10x1.5	
Voltage	36V	
No Load Speed	Transmission Mode	3,000-9,500/min
	Auto Mode	5,500/min
<b>Overall Length</b>	358mm	
Weight	2.6kg	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Depressed Center Wheel (100mm dia.), Side Handle, Wrench, 2 Battery Covers, Carrying Case	

\*Standard accessories may vary by country or area

MRP: ₹ 48,000/-

32

Pneumatic

<u>ISP</u>

STOP



# CORDLESS DISC GRINDER

## G 3618DA

MULTI VOLT 36V Cordless Disc Grinder with Slide Switch







Fastening

#### **Features**

- High performance with brushless motor
- Trigger switch with ON/OFF lock
- Brake, kickback, anti-restart & soft start function
- Soft grip & anti-vibration side handle
- Tool-less wheel guard

	Specificat	ions	
Capacity	Wheel Dia.	180mm	
Capacity	Hole Dia.	22.23mm	
Spindle Thread	M14x2		
Voltage	36V		1
No Load Speed	Normal Mode	5,300/min	
	Auto Mode	3,200/min	
Overall Length	531mm		
Weight	4.7kg (Without Battery)		
	2 Batteries (BSL36A18), Charger		
Accessories	(UC18YSL3), Depressed Center Wheel		ISP
Accessories	(180mm dia.), Side Handle, Wrench, 2		
Battery Covers, Carrying Case			

\*Standard accessories may vary by country or area

MRP: ₹ 35,600/-(Bare Tool)

<u>ISP</u>

Æ

HIKOKI



#### **CORDLESS CHARGER**

# Cordless

**UC 12SL** 10.8 - 12V Peak Charger



Chargers/ Batteries

## Li-ion

## **Features**

#### Compatible with engine generators •

Low-temperature charge (From -10°C)

	Specifications	
Charging Voltage 10.8 - 12V Peak		
Battery	Туре	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	

## Demolition UC 18YFSL

14.4V / 18V Charger

Li-ion

### **Features**

Rapid charging •



Auto

	Specifications	
Charging Voltage	14.4V and 18V	
Battery	Туре	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	



Fastening



Sawing

Cutting

**UC 18YGL2** 7.2V - 18V Chargers



**UC 18YG** 



	Specifications	
Charging Voltage	7 .2V - 18V	
Battery	Туре	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

Planing & Routing

Miscellaneous

Pneumatic





**Features** Rapid charging



	Specifications	
Charging Voltage	7 .2V - 18V	
Battery	Туре	Cassette
	Assortment	Lithium-ion
Fan cooling	Yes	

The actual charging time can vary depending on the surrounding temperature & battery condition





#### UC 18YSL3 14.4V / 18V Charger



#### **Features**

- Compatible with engine generators Low-temperature charge (From -10°C)
- High visibility large charge indicator lamp & full-color LED lights
- USB port (5V, 2A)

#### UC 3SFL 3.6V Charger

#### **Features**

• Large charge indicator lamp



	Specifications	
Charging Voltage	14.4 and 18V	
Battery	Туре	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	



	Specifications	
Charging Voltage	3.6V	
Battery	Туре	Cassette
	Assortment	Lithium-ion
Fan cooling	No	· · · ·

## UC 7SL

7.2V Charger

Li-ion

#### Features

- Large charge indicator lamp with 4 color LED status lights
- Battery capacity lamp (4 stages)
- Low-temperature charge (-10° C and above)

2	S	A CORP.	-	10
é	Ma	lin-		4
E.	~		X	
		-		

	Specifications	
Charging Voltage	7.2V	
Battery	Туре	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

#### UC 10SL2 10.8V Charger

Li-ion

#### **Features**

 For BCL1015 / BCL10155 / BCL1030C / BCL1030 / BCL1030M Lithium-ion batteries

CHARGING

	Specifications	
Charging Voltage	10.8V	
Battery	Туре	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

The actual charging time can vary depending on the surrounding temperature & battery condition

#### **CORDLESS BATTERIES**

Cordless

Drilling

#### 18V Lithium-ion Slide Battery

**BSL 1850MA** 

Chargers/ Batteries

## Li-ion

#### **Features**

Remaining battery indicator Compatible with all HiKOKI 18V rapid chargers





Spe	cifications
Voltage & Capacity	18V - 5.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 69 x 76mm
Weight	650g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V Lithium-ion slide batteries

## **BSL 1840M**

18V Lithium-ion



Fastening

# **Slide Battery**



#### **Features**

- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers



## NEW

Specifications	
Voltage & Capacity	18V - 4.0Ah
Cooling System	Yes
Dimensions (L x H x W)	134 x 83 x 54mm
Weight	600g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V Lithium-ion slide batteries



Sawing

Cutting

#### **BSL 1820M**

18V Lithium-ion **Slide Battery** 





# **Features**

**BSL 1240M** 


- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers

10.8 - 12V Peak Lithium-



Spe	cifications
Voltage & Capacity	18V - 2.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 76 x 49mm
Weight	380g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries





**IZV**PEAK

Li-ion

The actual charging time can vary depending on the surrounding temperature & battery condition





**IZV**PEAK

Li-ion

BSL 1220M

10.8 - 12V Peak Lithiumion Slide Battery



Sp	ecifications
Voltage	10.8 - 12V Peak
Capacity	2.0Ah
Dimensions (L x H x W)	91 x 45 x 74mm
Charging Time	Approx. 60 min (when using the UC12SL)
Compatible Products	UC12SL

## Cordless

i-ion

	_
	-
	ē
	3
	a.
	<u> </u>

The actual charging time can vary depending on the surrounding temperature & battery condition

### BSL 36A18

36V / 18V MULTI VOLT Lithium-ion Slide Battery



#### **Features**

- 1,080W high power output
- Automatic voltage change between 36V 2.5Ah and 18V 5.0Ah depending on the tool's voltage
- Remaining battery indicator
- Full compatibility with the existing 18V slide range and 14.4V-36V slide battery chargers

Sp	pecifications
Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 69 x 76mm
Charging Time	Approx. 32 min (when using the UC18YSL3)
Compatible Products	All existing 18V slide-type tools
compatible Products	MULTI VOLT 36V tools
Compatible Chargers	All chargers for 14.4V - 36V slide- type Lithium-ion batteries



# DRILLING DRILLS

нікокі

#### **DRILLING DRILLS**





#### D 10VSTA 10mm Drill



#### **Features**

**D 10VST** 10mm Drill

999041 🚻

**Features** 

- Soft grip handle
- Variable & reversible mode

Powerful 450w motor

Reversible by lever switch

Variable speed



Chuck Capacity	Specifications	
chuck capacity		
Capacity	Steel	10mm
Capacity	Wood	20mm
Power Input	450W	
No Load Speed	0-3,000/min	
Overall Length	245mm	
Weight	1.3kg	
Standard Accessories	Chuck Wrench	

#### MRP: ₹ 3,060/-

	Specificatio	ns
Chuck Capacity	10mm	
Conocity	Steel	10mm
Capacity	Wood	25mm
Power Input	450W	
No Load Speed	0-3,200/min	
Overall Length with Keyed Chuck	227mm	
Weight	1.2kg	
Overall Height	176mm(6-15/16"): D10VST	
Standard Accessories	Chuck Wrench	

MRP: ₹ 4,740/-

		Specifications	
	Chuck Capacity	1.5-13mm Keyed / k	eyless
	Capacity	Steel	13mm
	Capacity	Wood	40mm
	Power Input	690W	
	No Load Speed	Hi: 0-3,000/min Lo:	0-1,000/min
	Overall Length	333mm	
	Weight	1.9kg	
LOWHIGH	Standard Accessories	Chuck Wrench, Side Stopper	Handle, Depth

MRP: ₹ 8,840/-

LOW<sup>HIGH</sup>

## 13mm Drill

## 999041 🔣

**D** 13VH

#### **Features**

- Chuck offset 23.5mm •
- Aluminium Gear Cover for durability
- Soft grip handle
- Variable speed by trigger and dial

Variable Speed

()

#### **IMPACT DRILLS**

### DV 10VST

Cordless

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

Polishing & Sanding

Sawing

Cutting

Planing & Routing

**VTP 18** 

18mm Impact Drill

Metal gear housing

With 2 speed

999041 🚻

Features

•

10mm Impact Drill

374185 💹

#### Features

- Soft grip for easier handlingVariable speed trigger to suit
- multiple drilling application
  Forward & reversible for convenience



Spe	ecifications	
Drill Chuck	1.5-10mm	
	Metal	10mm
Capacity	Masonry	10mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-3,000/min	
Full Load Impact Rate	0-48,000/min	
Overall Length	290mm	
Weight	1.7kg	
Standard Accessories	Side Handle, E Accessory Kit	Depth Stopper,

#### MRP: ₹ 3,630/-

### DV 13VSS

13mm Impact Drill

#### 999041 <u> </u>

#### Features

- Cylindrical housing for durability
- Offset of chuck: 28mm
- Variable speed by dial & trigger



Sp	ecifications	
Drill Chuck	1.5-13mm	
	Concrete	13mm
Capacity	Steel	13mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-2,900/mir	1
Full Load Impact Rate	29,000/min	
Overall Length	270mm	
Weight	1.4kg	

#### MRP: ₹ 4,950/-



Sp	ecifications	
Drill Chuck	1.5-13mm	
Conscitu	Concrete	16mm
Capacity	Steel	13mm
Power Input	590W	
No Load Speed	0-2,900/min	
Full Load Impact Rate	34,500/min	
Overall Length	269mm	
Weight	1.5kg	
Standard Accessories		, Depth Gauge, se, Chuck Wrench

MRP: ₹ 7,720/-

Sp	ecifications		
Voltage	220V	220V	
Drill Chuck	1.5 - 13mm		
Speed change	1	2	
No-load speed	1,050/min	1,800/min	
Capacity Steel	13mm	8mm	
Capacity Concrete	18mm	10mm	
Power Input	640W		
Full Load Impact Rate	17,800-28,60	17,800-28,600/min	
Overall Length	340mm	340mm	
Weight	2.3Kg		

MRP: ₹ 8,950/-

Miscellaneous




Variable Speed

**(**)



#### 10 mm TOOL KIT

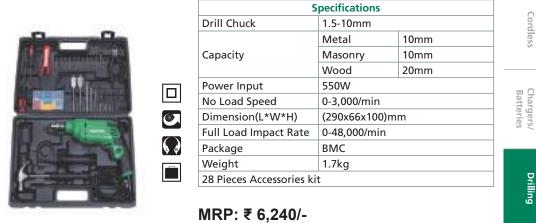

#### 13 mm TOOL KIT



	pecifications		
Drill Chuck	1.5-13mm	1.5-13mm	
	Concrete	13mm	
Capacity	Steel	13mm	
	Wood	20mm	
Power Input	550W		
No Load Speed	0-2,900/min		
Dimension(L*W*H)	(325x260x790)mm		
Full Load Impact Rate	29,000/min		
Overall Length	270mm		
Package	BMC		
Weight	1.7kg		
28 Pieces Accessories ki	t		

#### MRP: ₹ 6,800/-

Cordless

Drilling

Demolition

Fastening

Grinding

Cutting

۰

Reversible



# **ROTARY HAMMERS**

CAN LOW



#### DH 22PRS

Insulation

Speed

		]	Specifications	
		•	Concrete	22mm
		Capacity	Mild Steel	13mm
45			Wood	25mm
atures	(	Power Input	820W	
	SD	Ne less DDM	0-1100/min	
2-mode action: Rotation & Hammering mode and Rotation only mode	Sha	Full Load Impact	4400/min	
SDS Plus shank		rate Overall Length	385mm	
Variable speed trigger			2.8kg	
Drilling / Hammer Drilling		Weight	Liong	
H 24PG2				
mm Rotary Hammer			Specifications	
			Specifications Concrete	24mm
mm Rotary Hammer		Capacity		
mm Rotary Hammer		Capacity	Concrete	24mm
mm Rotary Hammer			Concrete Mild Steel	24mm 13mm
mm Rotary Hammer		Power Input	Concrete Mild Steel Wood	24mm 13mm 32mm
mm Rotary Hammer		Power Input Bit Shank	Concrete Mild Steel Wood Core Bit	24mm 13mm 32mm
mm Rotary Hammer		Power Input Bit Shank No Load Speed	Concrete Mild Steel Wood Core Bit 730W	24mm 13mm 32mm
mm Rotary Hammer		Power Input Bit Shank	Concrete Mild Steel Wood Core Bit 730W SDS-plus	24mm 13mm 32mm
mm Rotary Hammer		Power Input Bit Shank No Load Speed Full Load Impact rate Overall Length	Concrete Mild Steel Wood Core Bit 730W SDS-plus 0-1,050/min	24mm 13mm 32mm
mm Rotary Hammer		Power Input Bit Shank No Load Speed Full Load Impact rate Overall Length	Concrete Mild Steel Wood Core Bit 730W SDS-plus 0-1,050/min 0-3,950/min	24mm 13mm 32mm
mm Rotary Hammer 999041 M Seatures 2-mode action: Rotation and Hammering mode and Rotation only mode		Power Input Bit Shank No Load Speed Full Load Impact rate Overall Length Weight Standard	Concrete Mild Steel Wood Core Bit 730W SDS-plus 0-1,050/min 0-3,950/min 349mm 2.8kg	24mm 13mm 32mm
mm Rotary Hammer 999041  999041  90  eatures 2-mode action: Rotation and Hammering mode and Rotation only mode Compact design		Power Input Bit Shank No Load Speed Full Load Impact rate Overall Length Weight Standard	Concrete Mild Steel Wood Core Bit 730W SDS-plus 0-1,050/min 0-3,950/min 349mm 2.8kg	24mm 13mm 32mm 50mm Depth Gauge,
atures 2-mode action: Rotation and Hammering mode and Rotation only mode		Power Input Bit Shank No Load Speed Full Load Impact rate Overall Length Weight Standard	Concrete Mild Steel Wood Core Bit 730W SDS-plus 0-1,050/min 0-3,950/min 349mm 2.8kg Side Handle, Carrying Case	24mm 13mm 32mm 50mm Depth Gauge,



Clutch

Shank


only

Miscellaneous

Pneumatic

Hammering

#### **ROTARY HAMMERS**

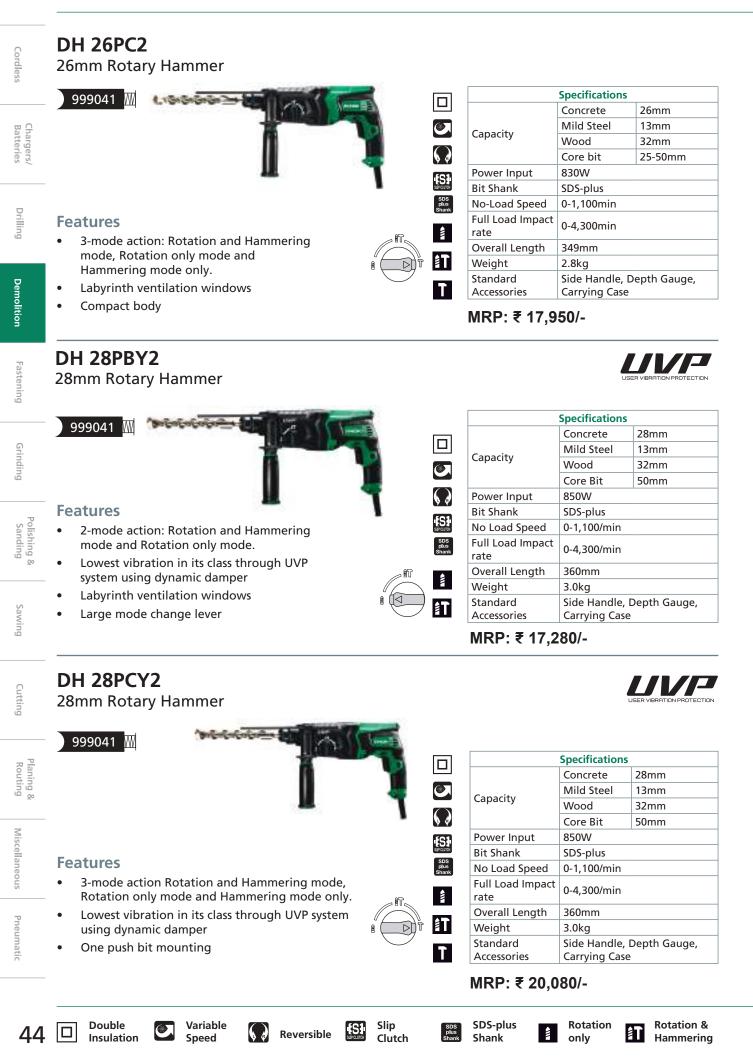



Cordless

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

Polishing & Sanding

Sawing

LVH

BRUSHLESS

### **DH 40MC**

10mm Rotary Hammer				
		5	Specifications	
		Constitut	Drill Bit	40mm
		Capacity	Core Bit	105mm
		Power Input	1,100W	
		Bit Shank	SDS max	
		No Load Speed	620/min	
999043 💹		Full Load Impact rate	2,800/min	
		Overall Length	448mm	
eatures		Weight	7.1kg	
<ul> <li>Large change lever</li> <li>Multiple bit angle setting.</li> </ul>	SDS SIPCUTR SDS max Shank	Standard Accessories	Side Handle, Hammer Gre Carrying Cas	ease A (30g),
		MRP: ₹ 43,43	30/-	

#### **DH 45MA**

45mm Rotary Hammer



	Sp	ecifications		
	Capacity	Drill bit 45mm		
	Capacity	Core bit	125mm	
	Power Input	1,400W		
	Bit Shank	SDS max		
	No Load Speed	380/min		
	Full Load Impact rate	2,900/min		
<b>{S</b> }	Overall Length	535mm		
	Weight	9.4kg		
SDS max Shank	Standard Accessories	Side Handle, S Rotary Hamme Carrying Case		

**[S]** 

SDS max Shank

LOWHGH

MRP: ₹ 60,080/-



Cutting

sno
Pneumatic

22	,50	

#### **Features**

- Powerful 1,400W motor delivers the power needed for heavy-duty applications
- Large change lever for easy and smooth mode switching
- Easy to hold large trigger switch

#### **DH 45ME** 45mm Rotary Hammer

DESIGN AWARD 2015

#### **Features**

- Maintains the speed and performance even at voltage drop
- Power lamp lights up when the plug is inserted into . an outlet
- Large mode change lever
- Large trigger switch

S	pecifications		
Capacity	Drill bit 45mm		
Capacity	Core bit	125mm	
Power Input	1,500W	^	
Bit Shank	SDS max		
No Load Speed	220V: 120 - 3	10/min	
Full Load Impact rate	220V: 1,200 - 2,950/min		
Overall Length	535mm		
Weight	9.0kg		
Standard Accessories	Side Handle, Stopper, Rotary Hammer Grease A, Carrying Case		

#### MRP: ₹ 72,450/-



Shock-Absorbing Handle Type

SDS max Shank

2-speed Gear

#### **ROTARY HAMMERS**



# **DEMOLISHING TOOLS**

HIKOKI

Ηίκοκι

#### **DEMOLISHING TOOLS**

H41 SST Demolition Hammer			LOW VERATION
	P		
374098 🕅			
		Deuver Innut	Specifications
	I	Power Input Full Load	1,010W
Features		Impact Rate	2,900/min
1,010w high power input		Bit Shank	17mm Hex
<ul> <li>Low vibration handle (LVH) for less user fatigue</li> </ul>		Overall Length	458mm
<ul> <li>Soft-grip side handle</li> </ul>		Weight Standard	5.7kg with side handle, without Bull Point, Flat Chisel, Side Hand
• Solt-grip side handle		Accessories	Wrench, Grease, Carrying Case
		MRP: ₹ 20,7	90/-
H41 MB2			
Demolition Hammer			
	and a		
Terrer 1			
999108 🕅			
1. 1. A.	The second second		Specifications
		Power Input	950W
		Full Load Impact	
Features		Rate	3000/min
Lightweight for less fatigue		Bit Shank	SDS max
Resin cylinder case cover		Overall Length	427mm
Multiple bit-angle settings		Weight Standard	5.2kg Side Handle, Bull Point, Carryi
	SDS max Shank	Accessories	Case
		MRP: ₹ 39,7	80/-
H60 MC (V)			
Demolition Hammer			
999044			
	Sector D		
			Specifications
Features		Power Input	1,250W
		Full Load Impact	1,600/min
<ul> <li>Focusto chomo tenel la simula statute la la la superiore</li> </ul>	ngle 💽	Rate Bit Shank	SDS max
Easy to change tool by single-step holder	igle 🌄	Overall Length	570mm
• Variable lock mechanism to adjust tool at 2-step an		Weight	11.3kg
<ul><li>Variable lock mechanism to adjust tool at 2-step an</li><li>Functional and robust design</li></ul>			
<ul> <li>Variable lock mechanism to adjust tool at 2-step an</li> <li>Functional and robust design</li> <li>Variable speed</li> </ul>		Standard	Side Handle, Carrying Case, Bu
<ul><li>Variable lock mechanism to adjust tool at 2-step an</li><li>Functional and robust design</li></ul>	SDS max Shank		Side Handle, Carrying Case, Bu Point
<ul> <li>Variable lock mechanism to adjust tool at 2-step an</li> <li>Functional and robust design</li> <li>Variable speed</li> </ul>		Standard	

Double

Insulation

Variable

Speed

Shock-Absorbing Handle Type SDS max

Shank

17 mm 17mm hex shank

SDS max Shank



Cordless

Drilling

Demolition

Fastening

Grinding

Polishing & Sanding

#### **H 60ME** LVH FHB **Demolition Hammer** BRUSHLESS Chargers/ Batteries **Specifications Features** 950W **Power Input** Compatible with engine generators Full Load Impact • ¥ 3000/min Rate Power lamp lights up when the plug is inserted SDS max €, Bit Shank into an outlet Overall Length 427mm One push action for quick bit mounting 3 Weight 5.2kg Tool bit angle adjustment Standard Side Handle, Bull Point, Carrying Large trigger switch Accessories Case MRP: ₹ 68,000/-**PH 65A Demolition Hammer** 999044 🕅

#### **Features**

H 65SB3

999086 🞹 AUTO STOP

**Features** 

- Heavy blow chipping mechanism
- Durable tool retainer
- Adjustable side handle

**Demolition Hammer** 

	Specifications
Power Input	1,240W
Full Load Impact Rate	1,400/min
Bit Shank	30mm Hex
Overall Length	642mm
Weight	15.0kg
Standard Accessories	Bull Point, Side Handle, Wrenches, Oil Feeder, Carrying Case

#### MRP: ₹ 68,440/-



Sawing

•	Due to the large heavyweight (cylindrical) striker,
	the chisel easily cuts into concrete, which makes
	users feel more comfortable during demolition work

- Lock-on button allows continuous operation without holding the switch lever
- Soft grip handles for more comfort •
- Large switch lever for more control .

	Specifications	
Power Input	1,340W	
Full Load Impact Rate	1,400/min	
Bit Shank	30mm Hex	
Overall Length	731mm	
Weight	18.0kg	
Standard Accessories	Bull Point, Carrying Case	

#### MRP: ₹ 89,210/-

Single Insulation


SDS max Shank

30 mm

30 mm

30mm hex shank

#### **DEMOLISHING TOOLS**

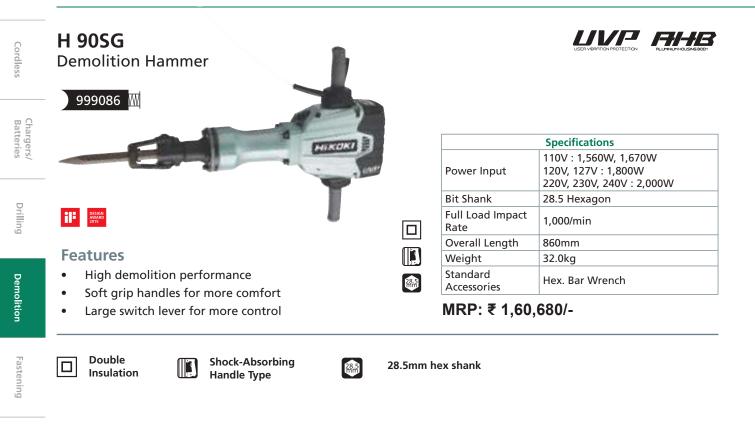



Grinding





#### **W 6VA4**

6mm Screw Driver



AUTO STOP

#### **Features**

- Detachable nose piece for easy to change and adjust a bit
- Soft grip handle
- Aluminium gear cover for durability
- Large trigger switch



	Specifications		
Conscitu	Drywall Screw 6mm		
Capacity	Self-Drilling Screw	6mm	
Bit Shank	6.35mm Hex		
Power Input	620W		
No Load Speed	0-3,000/min		
Overall Length	294mm		
Weight	1.4kg		
Standard	Driver Bit, Magnetic Bit Holder, Sub		
Accessories	Stopper		

MRP: ₹ 16,650/-

#### **WR 22SE**

22mm Impact Wrench



<u>ک</u>

#### **Features**

- Stable performance provided even at voltage drops
- Soft grip handle
- Tumbler-type forward/reverse switch
- Compatible with engine generators

Capacity	Ordinary Bolt 14-24mm		
Capacity	High Tension Bolt	16-22mm	
Tightening Torque	620Nm		
Square Drive	19mm		
Power Input	800W		
No Load Speed	1,400/min		
Impact Rate	2,000/min		
Overall Length	280mm		
Weight	5.2kg		
Standard Accessories	Side Handle, Carrying Case		

#### MRP: ₹ 60,690/-

**WR 25SE** 25mm Impact Wrench







#### MRP: ₹ 94,500/-

Fastening

FI-IB

FIHB

BRUSHLESS

BRUSHLESS



#### **Features**

- Stable performance provided even at voltage drops
- Soft grip handle

Double

- Tumbler-type forward/reverse switch
- Compatible with engine generators

Insulation

Variable

Speed





()

**Electronic Constant Speed Control** 



1

HIKOKI

# **GRINDING TOOLS**



### G 10552

100mm Disc Grinder	with
Slide Switch	



## 999067 M

- Newly-designed large fan and optimized air flow ensure efficient motor cooling for a long lifetime
- Small grip circumference of 197mm

	Specifications			
<b>C</b>	Wheel Dia	100mm		
	Capacity	Hole Dia	16mm	
	Spindle Thread	M10 x 1.5		
	Power Input	600W		
	No Load Speed	11,500/min. : 220-240V		
	Overall Length	254mm		
	Weight	1.7kg		
	Standard Accessories	Side Handle, Wrench		

#### MRP: ₹ 3,900/-

PDA-100	N

100mm Disc Grinder with Snap Switch

#### 999021 🚻

#### **Features**

- 100mm, 715W mini grinder
- Snap switch easy to use
- Excellent overload durability

	Specification	ons
Canadity	Wheel Dia	100mm
Capacity	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	715W	
No Load Speed	12,000/min.	
Overall Length	260mm	
Weight	1.5kg	
Standard Accessories	Depressed Center Wheel, Wrench	

#### MRP: ₹ 5,700/-

<b>G 10SR4</b> 100mm Disc Grinder with Slide Switch		Specificat	ions
		Wheel Dia	100mm
	Capacity	Hole Dia	16mm
999067 🔣	Spindle Thread	M10 x 1.5	
eatures	Power Input	730W	
	No Load Speed	10,000/min	
Newly-designed large fan and optimized air	Overall Length	258mm	
flow ensure efficient motor cooling for a long	Weight	1.7kg	
lifetime     Small grip circumference of 197mm	Standard Accessories	Side Handle	, Wrench

<u>ISP</u>

IS₽

MRP: ₹ 6,000/-



#### MRP: ₹ 7,400/-

Cordless



Spindle Lock

<u>ISP</u>

#### **DISC GRINDER**



4 🗆

Double Insulation Electronic Constant Speed Control Variable Speed Electronic Soft Start Control



## **G** 13SW

125mm Disc Grinder with Slide Switch





#### **Features**

- Max power output 1,600W
- Tool-less wheel guard
- Vibration-Absorbing side handle
- Small grip circumference (202mm) for more control and comfort

	Specificatio	ns	
	Wheel Dia	125mm	
Capacity	Hole Dia	22.2mm	
Spindle Thread	M14 x 2	M14 x 2	
Power Input	1,200W		
No Load Speed	12,000/min		
Overall Length	277mm		
Weight	2.3kg		
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench		

#### MRP: ₹ 8,820/-



ISP



MRP: ₹ 13,220/-

Cordless

Spindle Lock

#### LARGE ANGLE GRINDERS



Double Insulation

Spindle Lock



180mm

22.23mm

#### G 18SW2

180mm Disc Grinder with Trigger Switch



DESIGN AWARD

#### **Features**

HF.

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected for dust and debris through the labyrinth construction
- Soft grip handle
- Large switch lever for more control

ŀ

180mm Disc Grinder with Trigger Switch





#### Features

- Small and high power split core motor provides less weight
- Vibration-absorbing side handle
- Tool-less wheel guard

1	<u>ISP</u>

<u>ISP</u>

<u>ISP</u>

Specifications			
	Wheel Dia	180mm	
Capacity	Hole Dia	22.23mm	
Spindle Thread	M14 x 2	M14 x 2	
Power Input	2,400W		
No Load Speed	8,500/min		
Overall Length	492mm		
Weight	5.9kg		
Standard Accessories	Side Handle, Wrench		

Specifications Wheel Dia

Side Handle, Wrench

Hole Dia

M14 x 2

2,200W

469mm

4.9kg

8,500/min

Capacity

Spindle Thread

No Load Speed

**Overall Length** 

MRP: ₹ 14,500/-

Weight

Standard

Accessories

Power Input

#### MRP: ₹ 16,830/-

# Sawing

Cordless

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

Polishing & Sanding

230mm	Disc (	Grinder
with Tri	gger S	Switch

H F

G 23ST




- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected for dust and debris through the labyrinth construction
- Large switch lever for more control

	Specificatio	ns	
C it	Wheel Dia	230mm	
Capacity	Hole Dia	22.23mm	
Spindle Thread	M14 x 2		
Power Input	2,000W	2,000W	
No Load Speed	6,600/min		
Overall Length	469mm		
Weight	5.1kg	5.1kg	
Standard Accessories	Side Handle, Wrench		

MRP: ₹ 13,430/-

Double Insulation

#### LARGE ANGLE GRINDERS / DIE GRINDERS

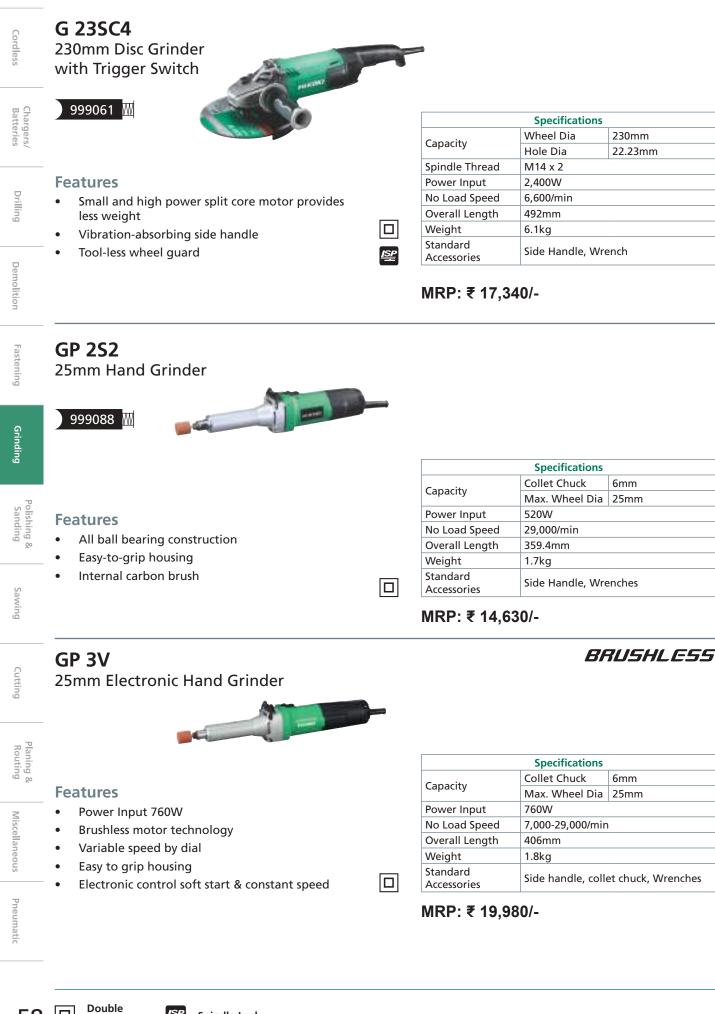

Spindle Lock





HiKOKI

#### **POLISHERS / ORBITAL SANDERS**



## **SAT 180**

**180mm Sander Polisher** 

For sanding and polishing

2-Speed: High and Low

#### 999043 🕅

**Features** 

Fastening

Cordless

Drilling

Demolition

## Grinding



品

Sawing

Cutting

**Features** 

WW

92mm Orbital Sander

Soft grip handle

**FSV 10SA** 

999041

New paper holder makes it easy to replace sanding paper

	Specificatio	ons	
	Pad Size	92x184mm	
Capacity	Orbit Dia.	2mm	
Power Input	180W	,	
No. Lood Coord	Spindle	10,000/min	
No Load Speed	Orbit	20,000/min.	
Overall Length	184mm	184mm	
Weight	1.3kg	1.3kg	
Standard	Sanding Pape	Sanding Papers, Dust Bag, Punch	
Accessories	Plate		

#### MRP: ₹ 7,400/-

60

Pneumatic



Electronic Constant Speed Control

Variable Speed

Electronic Soft Start Control





Spindle Thread M14x2 Power Input 705W No Load Speed Lo: 1,900/min. Hi: 3,400/min **Overall Length** 395mm Weight 2.9kg Standard Side Handle, Rubber Pad, Wool Accessories Bonnet, Sanding Discs, Wrenches 

Capacity

**Specifications** 

180mm

180mm

Sanding Disc

Wool Bonnet

#### MRP: ₹ 14,400/-



#### **SV 12SG**

110mm Orbital Sander





#### **Features**

- Large soft grip for comfort and control
- Dust collection

Specifications		
Constitut	Pad Size	110x100mm
Capacity	Orbit Dia.	1.5mm
Power Input	200W	
Neteric	Spindle	14,000/min
No Load Speed	Orbit	28,000/min
Overall Length	137mm	
Weight	1.1kg	
Standard Accessories	Sanding Paper, Dust Bag	

#### MRP: ₹ 6,930/-

#### **SV 13YA** 125mm Random **Orbital Sanders**





#### **Features**

- Random orbit sanding action
- Large soft grip for comfort and control
- Dust collection

	Specification	IS	
Capacity	Sanding Disc	125mm	
Power Input	230W		
No Load Speed	7,000-12,000/m	nin	
Overall Length	415mm		
Weight	1.4kg		
Standard Accessories	Sanding Paper	, Dust Bag	

#### MRP: ₹ 9,990/-

### **SB 8V2**

76mm Belt Sander

#### 999043 🔣

#### **Features**

- Sanding position visible through transparent cover
- Variable speed dial
- Dust bag on the left of the tool body for sanding at corner
- Width 171mm



	Specificati	ons
Capacity	Belt Size	76 x 533mm
Power Input	1,020W	
No-Load Belt Speed	250-450m/m	in
Overall Length	318mm	
Weight	4.5kg	
Standard Accessories	Sanding Belt	, Dust Bag

MRP: ₹ 19,660/-



**Dust Extracting** 沅 Туре

Electronic Constant **Speed Control** 

Variable Speed

()

**Random Orbit** 

Action

61

Chargers/ Batteries

Cordless

Drilling

Pneumatic

# SAWING TOOLS

12

Ηίκοκι



#### **C 7SS** 190mm Circular Saw



<u>IS₽</u>

<u>ISP</u>

	Specification	s	
	Blade Dia.	190mm	
Capacity	Max Cutting depth 90°	68mm	
	Max Cutting depth 45°	46mm	
Bevel Capacity	0-45°	0-45°	
Power Input	1,050W		
No Load Speed	5,500/min.		
Overall Length	291mm		
Weight	3.4kg		
Standard Accessories	Blade, Guide, Wrench		

MRP: ₹ 7,830/-

#### **Features**

999043

- Rigid aluminium base for fine cut
- Side handle easy to grip
- Backward dust emission

#### C 7ST 185mm Circular Saw



Fe	at	ure	es

999043 🗰

- Power input 1,710W
- Enhanced max cut depth
- Soft grip handle for reduced vibration & increased comfort

	Specification	s	
	Blade Dia.	185mm	
Capacity	Max Cutting depth 90°	62mm	
	Max Cutting depth 45°	47.5mm	
Bevel Capacity	0-45°		
Power Input	1,710W		
No Load Speed	6,000/min		
Overall Length	310mm	310mm	
Weight	4.3kg		
Standard Accessories	Blade, Guide, V	Blade, Guide, Wrench	

#### MRP: ₹ 12,000/-

C 9SA3	
235mm Circular	\$

999038



#### **Features**

- 4m cord •
- Convenient cord holder •
- Aluminium saw cover •
- Soft grip handle
- Large knob easy to adjust cut depth •

	Specification	s
	Blade Dia.	235mm
Capacity	Max Cutting depth 90°	86mm
	Max Cutting depth 45°	65mm
Power Input	2,000W	
No Load Speed	5,200/min	
Overall Length	397mm	
Weight	7.0kg	
Standard Accessories	Blade, Side Handle, Guide, Bolt, Wrench, Dust Collector, Short Lever	

#### MRP: ₹ 22,000/-



Spindle Lock <u>IS₽</u>

 $\sum$ 

 $\sum$ 

<u>ISP</u>

品

Blower Function

#### **SAWING TOOLS**

Cordless

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

**C 10FCE2** 255mm Compound Miter Saw

999065 🕅



#### **Features**

- Thumb actuated positive miter stops for quick • and easy adjustment
- Soft grip handle
- Equipped with chip deflector •
- Pivoting Sub-Fence for supporting larger stock



	Specifications	
	Blade Dia.	255mm
	(HxW) Cross Cut 0°	59 x 144mm or 89 x 101mm
Conositu	(HxW) Miter Cut 45°	59 x 102mm or 89 x 70mm
Capacity	(HxW) Miter Cut 52°	59 x 89mm or 89 x 54mm
	(HxW) Bevel Cut 45°	41 x 144mm
	Compound Miter 45° and Beve 45°	41 x 102mm
Power Input	1,520W	
No Load Speed	5,000/min	
Mitor Angles	Right	0 – 52°
Miter Angle:	Left	0 – 52°
Bevel Angle	Left	0 – 45°
Positive Miter Angle Stop	0, 15, 22.5, 31.6 and 45°	
Dimensions	460 x 628 x 561mm	
Weight	11.5kg	
Standard Accessories	Blade, Dust Bag, Vise Assy, Sub Fence,Wrenches	

#### MRP: ₹ 26,100/-

C 12FDHB
305mm Compound

Miter Saw

6ui,

Cutting

Planing & Routing

Polishing & Sanding

## 999065 💹



#### **Features**

- Xact Cut LED Shadow Line System Accurately indicates where the blade will cut on the material
- Compound Cutting Wide range of miter and • bevel cutting options
- Fences 7" tall sliding fences to support vertically & nested cut molding
- Extra large base for great support & handling of • material
- Adjustment Up-front miter and locks to easily • adjust cut angles to best suit the application
- New ergonomic D-handle design for less vibration •

Specifications		
Blade Dia.	305mm	
Arbor	25.4 mm	
No-Load Speed	4,300 RPM	
Miter Angle	0-52° L & R	
Bevel Angle	0-48° L & R	
Cut Capacity at 90°	31.75 x 203mm or 157 x 24mm	
Cut at 45° Miter (Left)	32 x109mm or 80 x 20mm	
Cut at 45° Miter (Right)	32 x110mm or 100 x 15mm	
Cut at 45° Bevel (Left)	0.8 x 203mm	
Cut at 45° Bevel (Right)	17 x 203mm	
Cut at 45° Miter/Bevel (Left)	20 x109mm	
Cut at 45° Miter/Bevel (Right)	109 x17mm	
Weight	20 kg	

#### MRP: ₹ 41,000/-

Miscellaneous



ISP Spindle Lock Insulation

Double

<u>ISP</u>

品

#### **SAWING TOOLS**

### FCJ 65V3

999041 💹

65mm Jig Saw



#### **Features**

- Variable speed dial
- Large soft grip for comfortable operation
- Motor with two ball-bearings for longer life and efficient power transmission
- Connectable directly with a dust collector without adapter

999041 💹

**Features** 

AC 90mm Jig Saw



	change
•	4-mode orbital action

Variable speed dial

- Soft grip handle
- Powerful dust blower keeps debris away

	Specifications	
Capacity	Wood	65mm
	Mild Steel Plate	6mm
	Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left	
Power Input	400W	
Length of Stroke	18mm	
No-Load Speed(stroke)	0-3,000/min	
Overall Length	197mm	
Weight	1.5kg	
Standard Accessories	Blade, Splinter Guard, Chip Cover, Wrench	

#### MRP: ₹ 8,550/-

**;** 

67

	Specifications	
	Wood	90mm
Capacity	Mild Steel Plate	10mm
	Min. Cutting Radius	25mm
Max Cutting Angle	45° Right/Left	
Power Input	705W	
Length of Stroke	26mm	
No-Load Speed(stroke)	850-3,000/min	
Overall Length	215mm	
Weight	2.2kg (without cord)	
Standard Accessories	Blade, Wrench, C Collector	Carrying Case, Dust

#### MRP: ₹ 11,660/-

CJ 160V			
160mm Jig Saw		Specification	s
		Wood	160mm
		Aluminium	20mm
999041 🔣	Capacity	Mild steel	10mm
		Min Cutting Radius	25mm
	Max Cutting Angle	45° Right/Left	
Features	Power Input	800W	
	Length of Stroke	26mm	
HiKOKI's original, 3-mode adjustable orbital     operation	No Load Speed	800 - 2,800/min	1
Tool-less blade change	Overall Length	249mm	
One-touch sub base for curved cutting	Weight	2.6kg	-
Fluorine base plate	3 Standard		No.42, No.123X), Sub Base, Chip Cover,
Splinter guard			Adapter, Wrench,
Soft grip handle		Carrying Case	

Ŀ

STOP

#### MRP: ₹ 17,000/-

ΗίΚΟΚΙ

Pneumatic

Blower  $\sum$ 



Variable

Speed

Electronic Constant Speed Control

**Orbital Cutting** Action

#### **RECIPROCATING SAW**





#### **CS 40Y** 400mm Chain Saw



#### **Features**

- Balanced design for more control
- Tool-less chain adjuster
- Large switch lever with soft start and over-load protection
- Chain oil flow adjuster
- Front and rear handles with soft grip

CM	<b>4</b> S	Т	
110n	nm	Cı	itt

110mm Cutter

999043 💹

**Features** 

**Dust Proof Switch** 

Power input 1,300W with overload durability



#### **Specifications** Wheel Dia. 110mm Capacity Max Cut Depth 34mm 1,300W **Power Input** 13,000/min No Load Speed **Overall Length** 214mm Weight 2.9kg Standard Wrench Accessories

**Specifications** 

230V

2,000W

14.5m/s

3/8″

0.05"

400mm

150mL

5.5kg

Chain Case

Sprocket Nose

490x217x220mm

Guide Bar, Saw Chain, Plug Clip

Voltage

Speed

Power Input No Load Chain

Chain Pitch

Dimensions

Dry Weight

Accessories

(LxWxH)

Standard

¥3

STOP

Chain Gauge

Guide Bar Length

Type of Guide Bar

**Oil Tank Capacity** 

MRP: ₹ 19,800/-

#### MRP: ₹ 6,580/-

Sawing

Polishing & Sanding

Cordless

Chargers/ Batteries

Drilling

Demolition

Fastening

Grinding

## CM 4SB2

110mm Cutter

999043 💹



#### Features

- Metal bush on a ball-bearing and sealed armature coil for durability
- Soft grip handle
- Tool-less depth adjustment

	Specifications	
	Wheel Dia.	110mm
Capacity	Max Cut Depth	34mm
	Cut Depth per cut	20mm
Power Input	1,320W	·
No Load Speed	11,500/min	
Overall Length	204mm	
Weight	2.8kg	
Standard	Water Plug, Rubbe	r Connector,
Accessories	Wrenches, Vinyl Ho	se

MRP: ₹ 6,750/-





#### **CUTTING TOOLS / PLANER**

#### CC 14STA

355mm High-Speed Cut-off Machine

#### 370779 💹

- **Features**
- Lightweight design •
- Quick lock vise .
- Spark diversion guard •
- With Spindle lock mechanism



Specifications		
Capacity : Cut-off Wheel Dia.	355mm	
Power Input	2,000W	
No Load Speed	3,900/min.	
Dimensions (L x W x H)	584 x 287 x 610mm	
Weight	14.1kg	
Standard Accessories	Cut-off Wheel, Wrench	

#### MRP: ₹ 13,740/-

<u>ISP</u>

#### CC 14STD 355mm High-Speed **Cut-off Machine**



Specificat	tions
Capacity : Cut-off Wheel Dia.	355mm
Power Input	2,200W
No Load Speed	3,800/min
Max Working Perphera Speed	4,800m/min.
Dimensions (L x W x H)	590 x 300 x 640mm
Weight	17.0kg
Standard Accessories	Cut-off Wheel, Wrench

#### MRP: ₹ 17,970/-

Specificat	ions
Capacity: Cut-off Wheel Dia.	355mm
Power Input	2,200W
No Load Speed	3,800/min
Max Working Perphera Speed	4,800m/min.
Dimensions (L x W x H)	590 x 300 x 650mm
Weight	17.0kg
Standard Accessories	Cut-off Wheel, Wrench

MRP: ₹ 21,740/-

ᆔ	
ğ	8
H.	E
Ξ	c
2	2

Miscellaneous

Pneumatic

## 82mm Planer

#### 999021 🔣 **Features**

**P 20ST** 

- Max cutting depth of 1.5mm •
- Compact & light weight
- Rabbeting depth: 9mm •
- Easy to adjust cutting depth by knob •
- Optional dust bag or elbow can be connected

Spindle Lock



Specifications		
Capacity: Cutting Width	82mm	
Max Cutting Depth	1.5mm	
Power Input	580W	
No Load Speed	17,000/min	
Overall Length	296mm	
Weight	2.5kg	
Standard Accessories	Blades, Blade Setting Gauge, Guide, Wrench	

#### MRP: ₹ 8,030/-

Chargers/ Batteries

Fastening

Grinding

Drilling

370779 💹 

#### **Features**

- With powerful motor of 2,200W
- With Spindle lock mechanism •
- D-shaped handle
- Quick lock vise
- Spark diversion guard •

Polishing & Sanding

Sawing

Cutting

#### CC 14STDU

355mm High-Speed **Cut-off Machine** 

### 370779 🕅

#### **Features**

- With powerful motor & Soft start •
- With Spindle lock mechanism
- D-shaped handle •
- Quick lock vise .
- Spark diversion guard



3	

R R R



# MISCELLANEOUS TOOLS

2000 carrier and and

#### **ROUTERS / TRIMMER**



MRP: ₹ 5,970/-



Double Insulation

Spindle Lock <u>ISP</u>

**Electronic Soft Start** Control

**Electronic Constant** Speed Control



**AW 100** High Pressure Washer





#### **Features**

- Max Pressure 100 Bar & portable
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use

_

	Specific	ations
Voltage (by areas)		Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input		1,400W
Max. Discharge Pressure		7.0MPa (1MPa: 10.2 kgf/ cm2)
Max Permissible Pressure		10.0MPa
Max Feed Pressure		0.7MPa
Max Water Discharge		5.5L/min
Permissible Temperature		40°C or less
Water Feeding Method		Faucet connection type
Dimensions (L x W x D)		305 x 245 x 465mm
Weight		5.4kg
Standard Accessories	Trigger gun, High-pressure hose (5m) Variable nozzle, Detergent bottle nozzle, Water feed connector, Nozzle cleaner pin, Cord holder, Gun holder, Handle (with 2 attachment screws)	

MRP: ₹ 10,970/-

#### AW 130

**High Pressure Washer** 






#### **Features**

- Max Pressure 130 Bar
- Washing of the wide range is possible with a long highpressure hose
- With wheels and handle for easy movement
- With siphon function
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use

	Specifi	ications
Voltage (by areas)		Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input		1,600W
Max. Discharge Pressure		9.0MPa (1MPa: 10.2 kgf/ cm2)
Max Permissible Pressure		13.0MPa
Max Feed Pressure		0.7MPa
Max Water Discharge		6.0L/min
Permissible Temperature		40°C or less
Water Feeding Method		Faucet connection type
Dimensions (L x W	x D)	325 x 260 x 790mm
Weight		8.3kg
Standard Accessories	Trigger gun, High-pressure hose (10m), Variable nozzle, Turbo nozzle, Detergent bottle nozzle, One-touch joint (black)(For use with the strainer hose), Water feed connector, Nozzle cleaner pin, Cord holder, Handle (with 4 attachment screws)	

MRP: ₹ 18,300/-

#### **PRESSURE WASHERS / SHEAR TOOL**

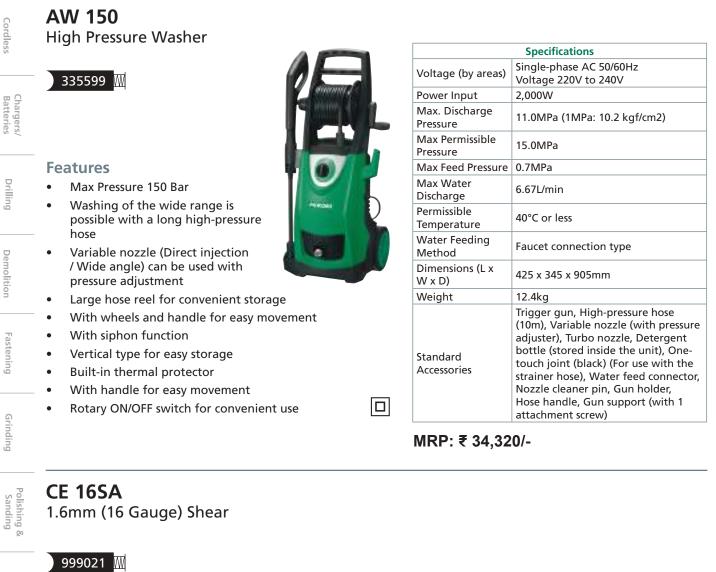



72

#### Double Insulation

Features

- Scrap guide protects operator's hand from cut-off strips
- Easily replaceable blades have 8 cutting edges each

	Specificatio	ons	
Capacity	Steel	1.6mm	
	Stainless	1.2mm	
Min. Cutting Radius	25mm	25mm	
Power Input	400W	400W	
No Load Speed	4,700/min.	4,700/min.	
Overall Length	250mm	250mm	
Weight	1.7kg	1.7kg	
Standard	Blade Set, Th	Blade Set, Thickness Gauge, Hex.Bar	
Accessories	Wrench	Wrench	

MRP: ₹ 33,000/-



#### **CN 16SA** 1.6mm (16 Gauge) Nibbler 10031 Specifications 1.6mm Steel Capacity 1.2mm Stainless 999021 🕅 Capacity: Cutting Width 5mm Min. Cutting Radius 40mm **Power Input** 400W No Load Speed 2,300/min **Overall Length** 250mm **Features** Weight 1.6kg Standard Accessories 2 Hex.Bar Wrenches 3 positive stop die holder allows for straight, right . and left cutting Downward cutting allows for cutting of trapezoidal metal plate

#### MRP: ₹ 33,960/-

## 999021 🗰

**RB 40SA** Blower

#### **Features**

- Soft grip handle
- Stands alone
- Heavy duty for industrial cleaning purpose

	Specifications	
	Air Pressure	5.5kPa
Capacity	Air Volume Flow	3.8m3/min
Power Input	550W	
No Load Speed	16,000/min	
Overall Length	447mm	
Weight	1.7kg	
Standard Accessories	Nozzle, Dust Bag	

#### MRP: ₹ 7,010/-

UM 12VST2 120mm Mixer 333631				-	Non in State
-			Specifications		
Features		Capacity	Max Stirrer Dia.	120mm	
<ul> <li>Easy-to-operate soft grip handle</li> </ul>		Power Input	1,200W		
Optimally-positioned variable speed		Tool Spindle Thread	M14		
dial	(		High	300 - 650/min	
• Steel frame integrated with the		No Load Speed	Low	150 - 300/min	
handle		Overall Length	336mm	<u>.</u>	
O-voltage restart protection and		Weight	5.4kg		
overload protection		Standard Accessories	Stirrer		

品


#### MRP: ₹ 16,200/-

Double
Insulation






tart 💵 Mul



#### **MIXER / HEAT GUN**

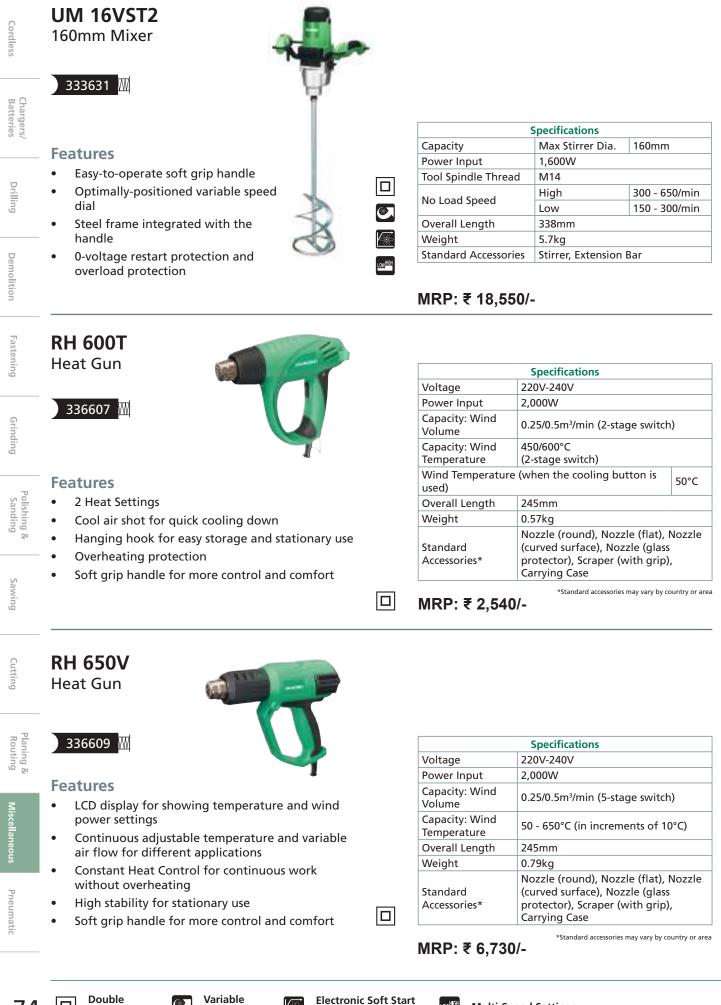

**Multi-Speed Settings** 

74

Insulation

Speed

Control





Specifications		
Type of Motor	Induction	
Tank Capacity	24 Ltrs	
Air Pressure	8 Bar	
Power Input	1.5 hp	
Weight	28kg	

ΗίΚΟΚΙ

	0
3atte	harg
ries	ers/

Cordless

#### **Features**

- 24 LTR Tank capacity
- Automatic protection against overload •
- Universal socket outlet •
- 2 solid rubber wheel for easy transport •

Specifications		
Type of Motor	Induction	
Tank Capacity	24 Ltrs	
Air Pressure	8 Bar	
Power Input	1.5 hp	
Weight	28kg	
Power Input Weight	•	

#### MRP: ₹ 28,990/-



#### BRANCHES

Ahmedabad	: 90999 20371
Bangalore	: 90083 04461
Bhubaneshwar	: 98302 00254
Chennai	: 94453 92512
Cochin	: 95677 61040
Delhi	: 97119 18942
Guwahati	: 98360 92333
Hyderabad	: 95917 92831
Jaipur	: 88240 99593
Kolkata	: 98311 60116
Lucknow	: 90267 53265
Ludhiana	: 85910 38099
Mumbai	: 75960 26989
Pune	: 97027 86342
Gurgaon	: 97111 92658



#### **Head Quarters:**

#### Koki Holdings Co., Ltd.

Shinagawa intercity Tower A, 20th Floor, 15-1 Konan 2-chrome, Minato-ku, Tokyo 108-6020 Japan.

Tel; +81-3-5783-0601

Fax: +81-3-5783-0709

#### **Registered & Head Office:**

#### HiKOKI Power Tools India Pvt. Ltd.

Plot No. 9A, 1st Phase, Peenya Industrial Area Bengaluru 560 058. India.

Tel: 080 - 4117 0777/78 / 2839 6198

Fax: 080 - 4117 1222

Email: ho.mktg@hikoki-powertools.in

Website: www.hikoki-powertools.in



Closed on Saturdays / Sunday and Public Holidays